

Backstops

**BACKSTOPS**

**CHAIN LINK WINGED BACKSTOPS for Permanent Installation in Ground**



**CHAIN LINK WINGED BACKSTOPS**

Permanent backstops are constructed by installing supplied 2-3/8" pipe supports approximately every 10' in concrete footings as shown on installation drawings provided. You then simply bolt factory pre-fabricated 5' x 10' panels in place to create your finished backstop. No more cutting and stretching chain link material in the field. These backstops are extremely durable and allow individual panels to be removed for re-screening or replacement as needed.  
**5 Year Limited Warranty.**

**CHAIN LINK PANELS—5' x 10'**

Prefabricated panels are the building blocks of these backstops. They simply bolt into place, eliminating on-site cutting and fitting. Panels are 5' x 10' & are composed of 1-5/16" O.D. galvanized tubing with center reinforcing brace and 9 gauge galvanized woven wire that is stretched and fastened on all sides with 3/8" rods and steel clamps. These 5' x 10' panels may also be used to construct 5' high fences for dugout and baseline extension.  
**5 Year Limited Warranty.**

**BSCL5X10 (each) \$395**

630 lbs.  
**BSCL10 (unit)**


**\$2,095**

705 lbs.  
**BSCL10H (unit)**

**\$2,495**


815 lbs.  
**BSCL10HW (unit)**

**\$2,895**

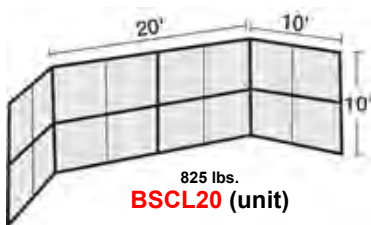

825 lbs.  
**BSCL20 (unit)**

**\$2,695**

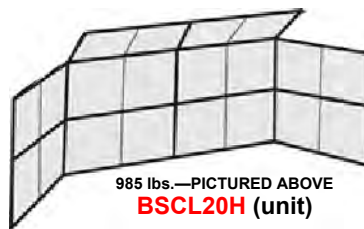

985 lbs.—PICTURED ABOVE  
**BSCL20H (unit)**

**\$3,395**



1,095 lbs.  
**BSCL20HW (unit)**

**\$4,195**

ALL PRICES SUBJECT TO CHANGE & AVAILABILITY PLUS SHIPPING